

Save This Manual
For Future Reference

SEARS

owner's
manual

Model No.

113.236090


Serial

Number _____

Model and serial numbers may be found attached to the right side of arm housing. You should record both model and serial numbers in a safe place for future use.

**FOR YOUR
SAFETY**

**READ ALL
INSTRUCTIONS
CAREFULLY**

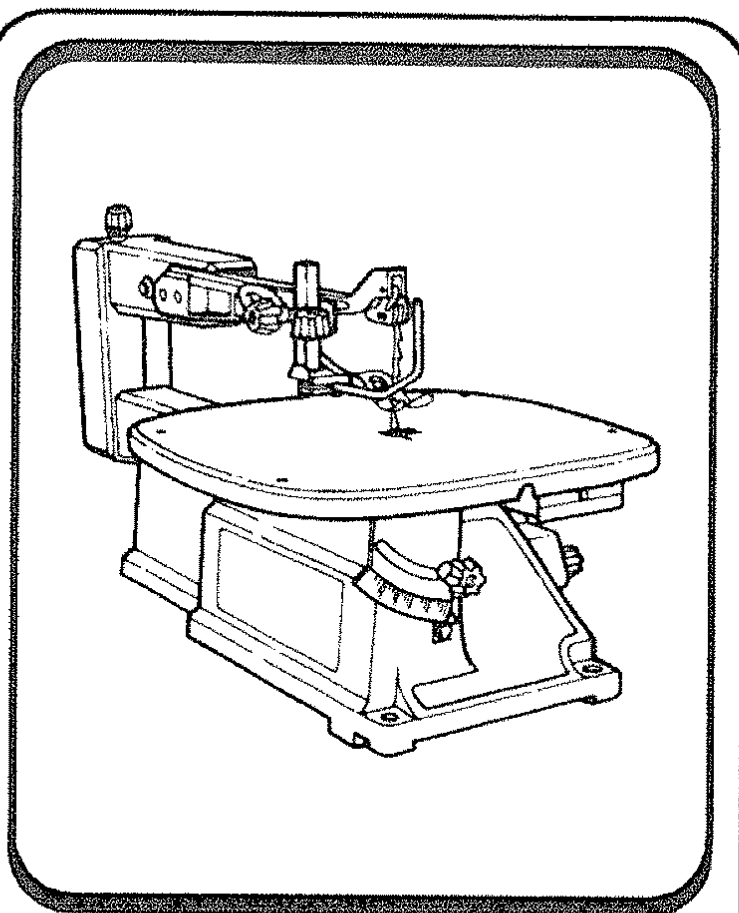

CRAFTSMAN®

**16 INCH VARIABLE
SPEED SCROLL SAW**

- assembly
- operating
- repair parts

Sears, Roebuck and Co., Hoffman Estates, IL 60179 U.S.A.

Part No. SP5837

Printed in U.S.A.

FULL ONE YEAR WARRANTY ON CRAFTSMAN BENCHTOP TOOLS

If this Scroll Saw fails due to a defect in material or workmanship, within one year from the date of purchase, RETURN IT TO THE NEAREST SEARS SERVICE CENTER IN THE UNITED STATES, and Sears will repair it, free of charge.

If this Scroll Saw is used for commercial or rental purposes, warranty will apply for ninety days from the date of purchase.

This warranty applies only while this product is in the United States.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Sears, Roebuck and Co., D817 WA Hoffman Estates, IL. 60179

Safety Instructions for Scroll Saw

Safety is a combination of common sense, staying alert and knowing how

your scroll saw works. Read this manual to understand this saw.

Safety Signal Words

DANGER: means if the safety information is not followed someone **will** be seriously injured or killed.

WARNING: means if the safety information is not followed someone **could** be

seriously injured or killed.

CAUTION: means if the safety information is not followed someone **might** be injured.

Before Using The Saw

WARNING: To avoid mistakes that could cause serious permanent injury, do not plug the saw in until the following steps are completed.

- Completely assemble and align saw (see "Assembly and Alignment" sections within).
- Learn the use and function of the speed control ON-OFF knob, bevel lock knob, blade holders, blade support, hold down, tension knob, and blade guard. (See "Getting to Know Your Scroll Saw" section.)
- Review and understand all safety instructions and operating procedures in this manual.
- Review the maintenance methods for this saw. (See "Maintenance" section.)
- Read the warning label below, found on the base of the saw.

WARNING

1. Read manual before using saw.
2. Wear safety goggles that meet ANSI Z87.1 Standards.
3. Be sure blade is installed with teeth pointing down.
4. Properly adjust holddown.
5. Keep fingers away from the moving blade.
6. Do not remove jammed cutoff pieces until blade has stopped.
7. Maintain proper adjustment of blade tension.
8. Hold workpiece firmly against the table.
9. Turn power off and wait for blade to stop before adjusting or servicing.

500-1700 RPM 1 PHASE 120 VOLT AC ONLY 60 HZ 1.2 AMPS



When Installing or Moving The Saw

Avoid Dangerous Environment. Use the saw in a dry indoor place, protected from rain. Keep work area well lighted.

To avoid injury from unexpected saw movement:

- Turn saw off and unplug cord before moving the saw.
- Place the saw on a firm level surface where there is plenty of room for handling and properly supporting the workpiece.
- Support the saw so the table is level and the saw does not rock.
- Bolt the saw to the work surface if it tends to slip, walk, or slide during operations like cutting long heavy boards, or when using an auxiliary table.
- **Never Stand On Tool.** Serious injury

could occur if the tool tips or you accidentally hit the cutting tool. Do not store any item above or near the tool where anyone might stand on the scroll saw to reach that item.

To avoid injury or death from electrical shock:

- Ground the saw. This saw has an approved 3 conductor cord and a 3-prong grounding type plug. Use only 3-wire, grounded outlets rated 120 volts, 15 amperes (amps). The green conductor in the cord is the grounding wire. To avoid electrocution, NEVER connect the green wire to a live terminal.
- Make sure your fingers do not touch the plug's metal prongs when plugging or unplugging the saw.

Before Each Use

Inspect your saw.

Disconnect The Saw. To avoid injury from accidental starting, unplug the saw, turn the switch off and lock out the switch before changing the setup, removing covers, guards or blade.

Check For Damaged Parts. Check for:

- Alignment of moving parts.
- Binding of moving parts.
- Broken parts.
- Stable mounting.
- Any other conditions that may affect the way the saw works.

If any part is missing, bent or broken in any way, or any electrical parts don't work properly, turn the saw off and unplug the saw. **Replace** damaged, missing or failed parts before using the saw again. **Keep Guard In Place** and in working order.

Maintain Tools with Care. Keep the saw clean for best and safest performance. Follow instructions for lubricating.

Remove adjusting keys and wrenches from tool before turning it on.

To avoid injury from jams, slips or thrown pieces

- **Use Only Recommended Accessories.** (See "Recommended Accessories" section). Consult this owners manual for recommended accessories.

Follow the instructions that come with the accessories. The use of improper accessories may cause risk of injury to person.

- Choose the right size and style blade for the material and the type of cutting you plan to do.
- Make sure the blade teeth point downward, toward the table.
- Make sure the blade tension is properly adjusted.
- **Keep Work Area Clean.** Cluttered areas and benches invite accidents. Floor must not be slippery.
- To avoid burns or other fire damage, never use the saw near flammable liquids, vapors or gases.
- **Know Your Saw.** Read and understand the owners manual and labels affixed to the tool. Learn its application and limitations as well as the specific potential hazards peculiar to this tool.
- To avoid injury from accidental contact with moving parts, don't do layout, assembly, or setup work on the saw while any parts are moving.

- **Avoid Accidental Starting.** Make sure switch is "OFF" before plugging saw into a power outlet.

Safety Instructions for Scroll Saw (continued)

Plan Your Work.

- **Use The Right Tool.** Don't force tool or attachment to do a job it was not designed to do.
- Use this scroll saw to cut only wood, woodlike products, plastics and nonferrous metals.

CAUTION: This saw is NOT designed for cutting ferrous metals like iron or steel. When cutting nonferrous metals (brass, copper and aluminum, etc.), metal shavings can react with wood dust and start a fire. To avoid this:

- Remove all traces of wood dust from on and around the saw.
- Remove all metal shavings from on or around the saw before sawing wood again.

Plan Ahead To Protect Your Eyes, Hands, Face and Ears

Any power saw can throw foreign objects into the eyes. This can cause permanent eye damage. Wear safety goggles (not glasses) that comply with ANSI Z87.1 (shown on package). Everyday eyeglasses have only impact resistant lenses. They are not safety glasses. Safety goggles are available at Sears Retail Stores. Glasses or goggles not in compliance with ANSI Z87.1 could seriously hurt you when they break.



Dress for safety

- Do not wear loose clothing, gloves, neckties or jewelry (rings, wrist-watches). They can get caught and draw you into moving parts.
- Wear nonslip footwear.
- Tie back long hair.
- Roll long sleeves above the elbow.
- Noise levels vary widely. To avoid possible hearing damage, wear ear plugs or muffs when using saw for hours at a time.
- For dusty operations, wear a dust mask along with the safety goggles.

Inspect Your Workpiece.

Make sure there are no nails or foreign objects in the part of the workpiece to be cut.

Use extra caution with large, very small or awkward workpieces

- Never use this tool to finish pieces too small to hold by hand.
- Use extra supports (tables, saw horses, blocks, etc.) for any workpieces large enough to tip when not held down to the table top.
- **Never** use another person as a substitute for a table extension, or as additional support for a workpiece or to help feed, support or pull the workpiece.
- When cutting irregularly shaped workpieces, plan your work so it will not pinch the blade. A piece of molding, for example, must lay flat or be held by a fixture or jig that will not let it twist, rock or slip while being cut.
- Properly support round material such as dowel rods or tubing. They have a tendency to roll during a cut, causing the blade to "bite". To avoid this, always use "V" blocks.
- Cut only one workpiece at a time.
- Clear everything except the workpiece and related support devices off the table before turning the saw on.

Plan the way you will hold the workpiece from start to finish.

- Do not hand hold pieces so small that your fingers will go under the blade guard. Use jigs or fixtures to hold the work and keep your hands away from the blade.
- Avoid awkward operations and hand

positions where a sudden slip could cause fingers or hand to move into the blade.

- **Don't Overreach.** Keep good footing and balance.
- Keep your face and body to one side of the blade, out of line with a possible thrown piece if the blade should break.

Whenever Saw Is Running

WARNING: Don't let familiarity (gained from frequent use of your scroll saw) cause a careless mistake. A careless fraction of a second is enough to cause a severe injury.

- Before starting your cut, watch the saw while it runs. If it makes an unfamiliar noise or vibrates excessively, stop immediately. Turn the saw off. Unplug the saw. Do not restart until finding and correcting the problem.
- **Keep Children Away.** Keep all visitors a safe distance from the saw. Make sure bystanders are clear of the saw and workpiece.
- **Don't Force Tool.** It will do the job better and safer at its designed rate. Feed the workpiece into the saw blade only fast enough to let it cut without bogging down or binding.

Before Freeing Any Jammed Material.

- Turn switch "OFF"
- Wait for all moving parts to stop.
- Unplug the saw.

When backing up the workpiece, the blade may bind in the kerf (cut). This is usually caused by sawdust clogging up the kerf. If this happens:

- Turn switch "OFF".
- Wait for all moving parts to stop.
- Unplug the saw.
- With a flat blade screwdriver, turn motor shaft by hand. Insert the screwdriver into the slotted end of motor shaft located at the center of the motor housing. Do this while backing up the workpiece.

Before removing loose pieces from the table, turn saw off and wait for all moving parts to stop.

Before Leaving the Saw

- Wait for all moving parts to stop.
- **Make Workshop Child-proof.** Unplug the saw. Lock the workshop and ON/OFF knob on the saw. Store the key away from children and others not qualified to use the tool.

Glossary of Terms for Woodworking

Kerf - the slot cut by the blade.

Leading Edge - the edge of the workpiece which is pushed into the blade first.

Sawblade Path - the area of the workpiece directly in line with and moving toward the sawblade edge.

Bevel - the ability to slant the table to make angle cuts. An angle cutting operation through the face of the board.

Blade Tooth Set - the distance that the edge of the sawblade tooth is bent (or set) outward from the side of the blade.

Trailing Edge - the workpiece edge last cut by the sawblade.

Workpiece - the item on which the cutting operation is being performed.

Motor Specifications and Electrical Requirements

Power Supply and Motor Specifications

WARNING: To avoid electrical hazards, fire hazards or damage to the tool, use proper circuit protection. Your tool is wired at the factory for operation using the voltage shown. Connect tool to a power line with the appropriate voltage and a 15-amp branch circuit. Use a 15-amp time delay type fuse or circuit breaker. To avoid shock or fire, if power cord is worn or cut, or damaged in any way, have it replaced immediately.

For replacement motor and control board, refer to parts list in this manual.

CAUTION: A direct current motor is used in this saw. Changes to the internal wiring will create a fire hazard and may also create a shock hazard.

This machine is equipped with a variable speed motor having the following specifications:

Voltage	110-120
Amperes	1.2
Hertz (Cycles)	60
Phase	Single
RPM	500-1700
Rotation of Shaft	Clockwise

General Electrical Connections

DANGER: To avoid electrocution:

- Use only identical replacement parts when servicing. Servicing should be performed by a qualified service technician.
- Do not use in rain or where floor is wet.

This tool is intended for indoor residential use only.

WARNING: Do not permit fingers to touch the terminals of plug when installing or removing the plug to or from the outlet.

If power cord is worn or cut, or damaged in any way, have it replaced immediately.

110-120 Volt, 60 Hz. Tool Information

NOTE: The plug supplied on your tool may not fit into the outlet you are planning to use. Your local electrical code may require slightly different power cord plug connections. If these differences exist refer to and make the proper adjustments per your local code before your tool is plugged in and turned on.

In the event of a malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This tool is equipped with an electric cord having an equipment grounding conductor and a grounding plug, as shown. The plug must be plugged into a matching outlet that is properly installed and grounded in accordance with all local codes and ordinances.



Do not modify the plug provided. If it will not fit the outlet, have the proper outlet installed by a qualified electrician.

A temporary adapter may be used to connect this plug to a 2-prong outlet, as shown, if a properly grounded outlet is not available. This temporary adapter should be used only until a properly grounded outlet can be installed by a qualified electrician. The green colored rigid ear, lug and the like, extension from the adapter must be connected to a permanent ground such as a properly grounded outlet box.

Improper connection of the equipment grounding conductor can result in a risk of electric shock. The conductor with insulation having an outer surface that is green with or without yellow stripes is the equipment grounding conductor. If repair or replacement of the electric cord or plug is necessary, do not connect the equipment-grounding conductor to a live terminal.

If the grounding instructions are not completely understood, or if you are in doubt as to whether the tool is properly grounded check with a qualified electrician or service personnel.

WARNING: If not properly grounded, this tool can cause an electrical shock, particularly when used in damp locations, in proximity to plumbing, or out of doors. If an electrical shock occurs there is the potential of a secondary hazard, such as your hands contacting the sawblade.

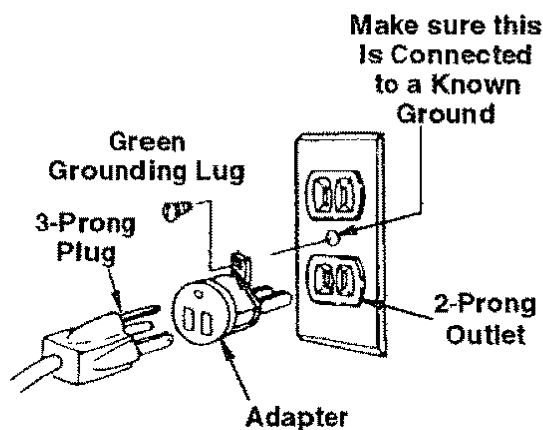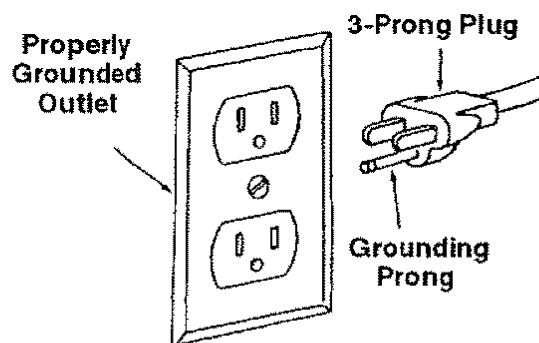

NOTE: The adapter illustrated is for use only if you already have a properly grounded 2-prong outlet.

Motor Specifications and Electrical Requirements (continued)

Wire Sizes

NOTE: Make sure the proper extension cord is used and is in good condition.

The use of any extension cord will cause some loss of power. To keep this to a minimum and to prevent overheating and motor burn-out, use the table shown to determine the minimum wire size (A.W.G.) extension cord.

Use only 3-wire extension cords which have 3-prong grounding type plugs and 3-pole receptacles which accept the tools plug.


Extension Cord Length	Wire Sizes Required for (A.W.G.)
	110-120V
0-25 Ft.	18
26-50 Ft.	16

Table of Contents

Safety Instructions for Scroll Saw	2	Over Tensioning Or Under Tensioning	
Safety Signal Words	2	Blade	13
Before Using The Saw	2	Removing Pin End Blades	14
When Installing or Moving The Saw	3	Installing Pin End Blades	15
Before Each Use:	3	Removing Plain End Blades	16
Safety Instructions for Scroll Saw	4	Installing Plain End Blades	17
Plan Ahead To Protect Your Eyes,		Dust Blower	18
Hands, Face and Ears:	4	Blade Guard	18
Whenever Saw Is Running:	5	Mounting the Scroll Saw	18
Before Leaving the Saw:	5	Workbench Applications	18
Glossary of Terms for Woodworking	5	Leg Set Applications	18
Motor Specifications and Electrical		Safety Instructions for Basic Saw	
Requirements	6	Operations	19
Power Supply and Motor		Before Each Use:	19
Specifications	6	Plan Ahead To Protect Your Eyes,	
General Electrical Connections	6	Hands, Face And Ears:	20
110-120 Volt, 60 Hz. Tool		Whenever Saw Is Running:	20
Information	7	Before Leaving The Saw:	21
Wire Sizes	8	Basic Saw Operations	21
Table of Contents	8	General Instructions	21
Unpacking and Checking Contents	9	Making Interior Scroll Cuts	22
Tools Needed	9	Choice of Blade and Speed	22
Unpacking	9	Maintenance	23
List of Loose Parts	9	Sears Recommends the Following	
Getting to Know Your Scroll Saw	10	Accessories	23
Alignment (Adjustments)	12	Recommended Accessories	23
Changing the Table Bevel Angle	12	Troubleshooting	24
To Align the Bevel Indicator	12	Wiring Diagram	25
Adjusting Work Hold-down	13	Repair Parts	26

Unpacking and Checking Contents

Tools Needed



Medium Standard Screwdriver

Unpacking

WARNING: To avoid injury, from unexpected starting or electrical shock, do not plug the power cord into a power source outlet during unpacking and assembly. This cord must remain unplugged whenever you are working on the saw.

Your scroll saw is fully assembled and shipped complete in one box.

IMPORTANT: Never lift this saw by the arm which holds the blade or damage will occur to your saw.




Separate all parts from packaging materials and check each item with illustration and "List of Loose Parts". Make certain all items are accounted for before discarding any packaging material.

NOTE: Before beginning assembly, check that all parts are included. If you are missing any part, do not assemble the saw. Contact your Sears Service Center to get the missing part. Sometimes small parts can get lost in packaging material. DO NOT throw away any packaging until saw is put together. Check packaging for missing parts before contacting Sears. A complete parts list (Repair Parts) is at the end of the manual. Use the list to identify the number of the missing part.


List of Loose Parts

Item	Description	Qty.
A	16" Scroll Saw (Completely Assembled)	1
B	Owner's Manual.....	1
C	Loose Parts Bag containing: Blade	1

NOTE: Hardware to mount this scroll saw to a bench or leg set is **not** supplied. See mounting instructions for recommended hardware size.

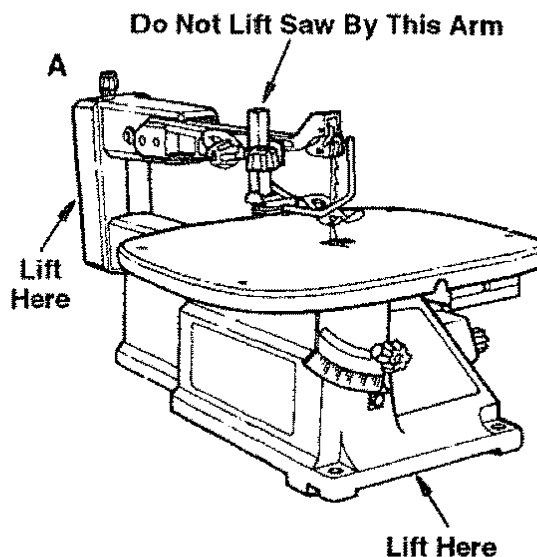

Getting to Know Your Scroll Saw

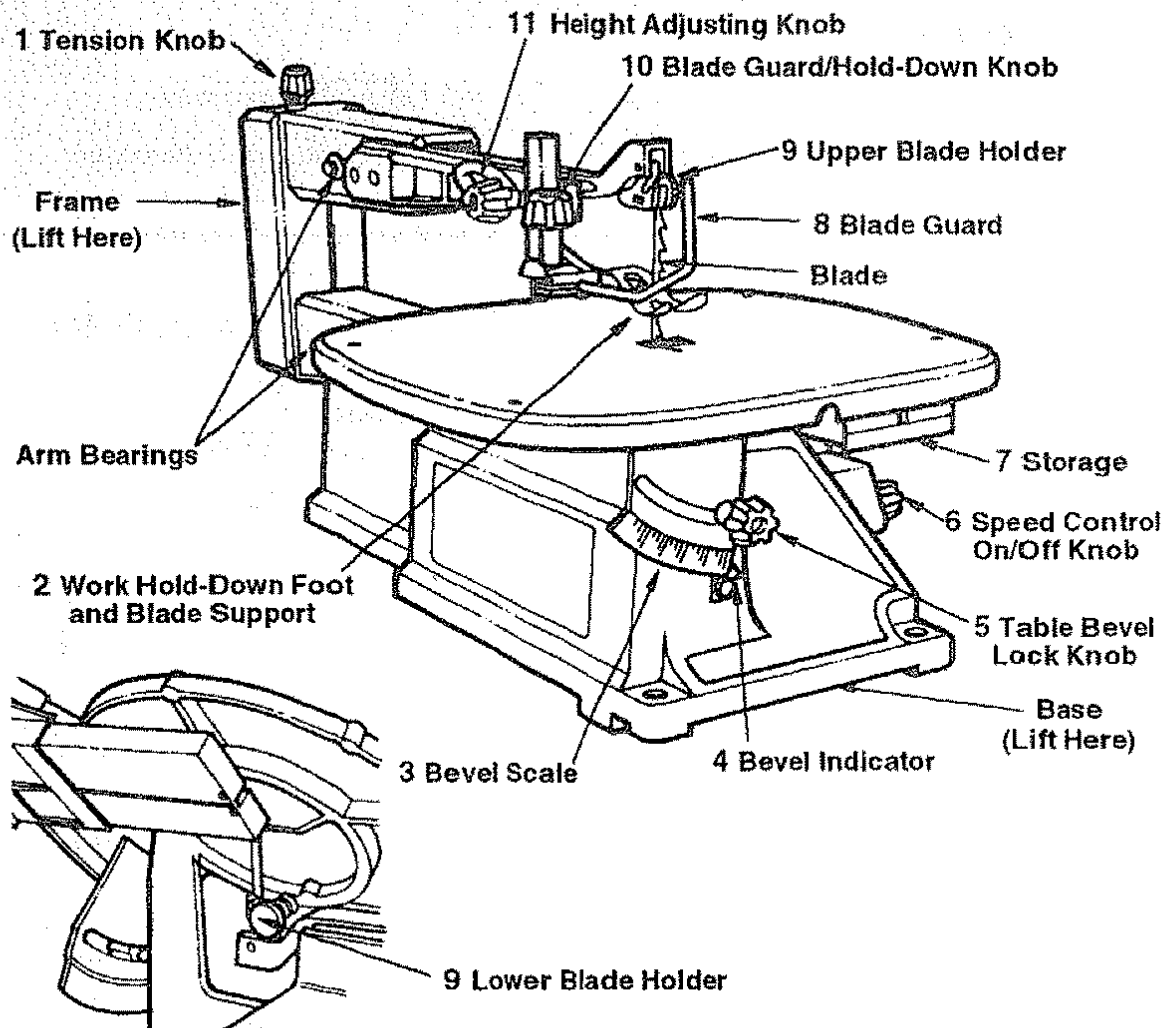



1. **Tension Knob** - Tightening the knob (clockwise) will increase the tension on the blade. Loosening it (counterclockwise) will decrease the tension.
2. **Work Hold-Down and Blade Support** - Provides added control of workpiece, protection for operator and support for the blade.
3. **Bevel Scale** - Shows angle table is tilted for bevel cutting.
4. **Bevel Indicator** - Points to the approximate angle of the blade in relation to the table top.
5. **Table Bevel Lock Knob** - When tightened, this knob secures table at desired bevel angle. Loosening knob allows the table to tilt up to 45° for bevel cuts.
6. **Speed Control/On-Off Knob** - For speed control setting, refer to the "Choice of Blade and Speed" table. The On-Off knob has a locking feature, **This Feature Is Intended To Help Prevent Unauthorized Use By Children And Others.** (See more on next page.)
7. **Storage Drawer** - For convenient storage of pin and plain blades.
8. **Blade Guard** - Defines area of moving blade.
9. **Blade Holders** - Retain and position the blade.
10. **Blade Guard/Hold Down Knob** - Allows for secure angular positioning of blade guard, work hold down and sawdust blower.
11. **Height Adjustment Knob** - Allows for vertical positioning of item in number 10.

Speed Control/On-Off Knob (continued)

- To turn machine "ON", place fingers on Speed Control/On-Off Knob and pull out.
- To turn machine "OFF", push in Speed Control/On-Off Knob.

WARNING: Never leave the machine unattended until it has come to a complete stop.

The variable speed control may be adjusted to the approximate speeds identified on the control panel. Suggested speeds are identified under "Choice of Blade and Speed". Turn the control knob clockwise  to increase strokes per minute and counterclockwise  to reduce the strokes per minute.






NOTE: If the unit stops running during use, it typically means too much force is being used to feed the workpiece into the blade, and the built-in circuit breaker automatically shuts the unit off to protect the motor. To restart unit, turn switch off to reset circuit breaker and then back on to continue cutting.

Due to circuit protection, the unit may not always start. If unit does not start, shut unit off, wait approximately ten seconds, and restart.

Do not cycle unit on and off. Built-in circuit protection may prevent unit from immediately restarting. Wait approximately ten seconds after shutting unit off before restarting.

- To lock knob in "OFF" position, install a padlock from the left side of the knob through the hole below the knob as illustrated, and lock the padlock. (Padlock is not supplied with the saw.)

WARNING: For your own safety, always push the knob "Off" when machine is not in use. Also, in the event of a power failure (all of your lights go out), push knob "Off". "Lockout" your knob with a padlock as shown. This will prevent the machine from starting up again when the power comes back on.

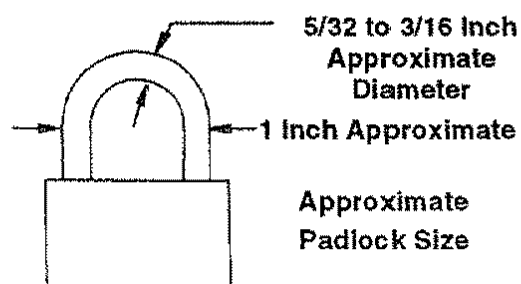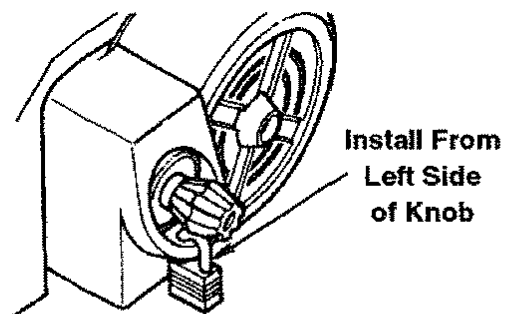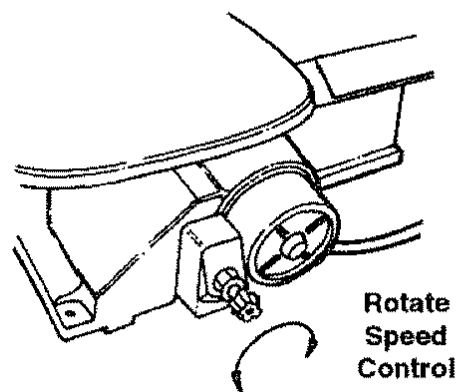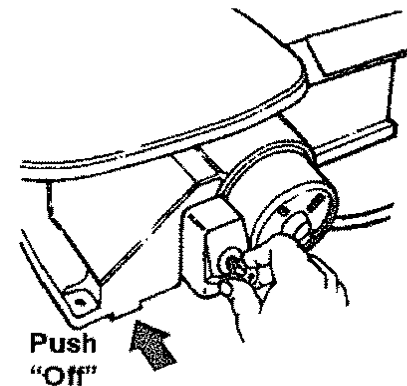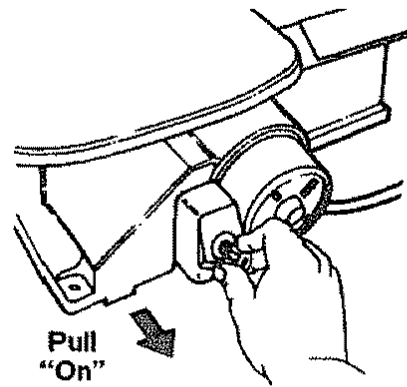


Alignment (Adjustments)

Changing the Table Bevel Angle


- The scroll saw work table can be tilted to the left for bevel cutting up to 45° from the 0° or horizontal cutting position.
- A bevel scale and indicator are provided under the work table as a convenient reference for setting the approximate table angle for bevel cutting.

NOTE: A scroll saw is a scroll curve cutting tool. It is not intended for making precise angular cuts in wood. The indicator is provided to give approximate angular readings. A precision protractor or square should be used to measure a more precise blade to table angular locations.

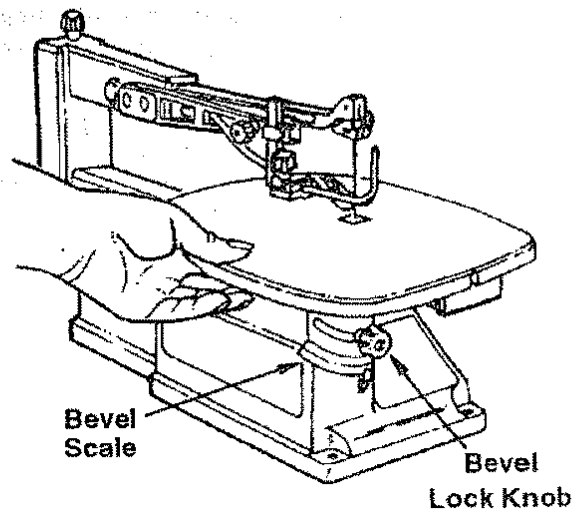


To Align the Bevel Indicator

- Loosen the table bevel lock knob and use a small square to set the table at 90° to the blade.
- When there is no space between the square and the blade, hold table in place and tighten the bevel lock knob. The table should now be approximately 90° to the blade.

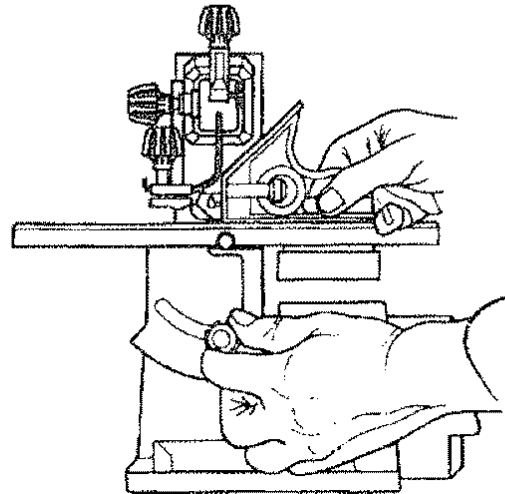

- Loosen the screw holding the bevel scale pointer and adjust to 0° . Tighten screw.

Remember, the bevel scale is a convenient guide but should not be relied upon for precision.

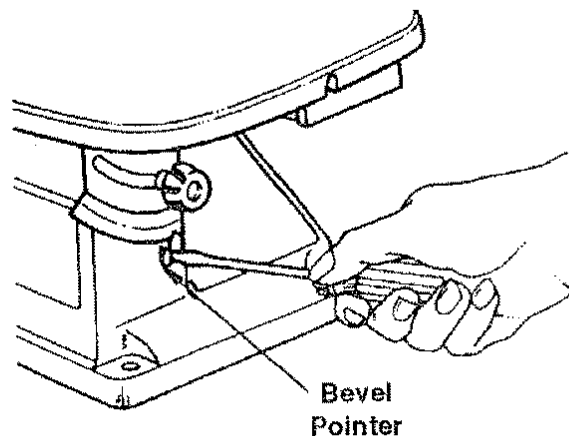

Adjusting Work Hold-down



WARNING: To avoid injury from accidental starting, always turn switch "OFF" and unplug power cord from outlet before removing or replacing the blade.

The purpose of the work hold-down foot is to hold the work against the table so that it is less likely to lift with the up stroke of the blade. It should lie flat on the workpiece with the front prongs straddling the blade.

1. The work hold-down foot is attached to the blade guard rod. The height of the work hold-down foot is adjusted by loosening the height adjustment knob and moving the guide post up or down. The work hold-down foot is adjusted front to back and left-to-right by loosening the hold-down knob located on the bracket, as illustrated.
2. When the table is tilted, the work hold-down foot can be adjusted by loosening the height adjustment knob and adjusting the foot to the same angle as the table. The work hold-down foot should always be adjusted as close to the blade as possible without touching it and positioned directly on the surface of the workpiece.

NOTE: For most applications tightening the hold down knob with your fingers is adequate. However, the hold down knob can also be tightened using a 5/16" hex wrench as shown. For better versatility, the height adjustment knob and hold down knob can be interchanged.

WARNING: To avoid injury from thrown objects, remove all tools from the saw.

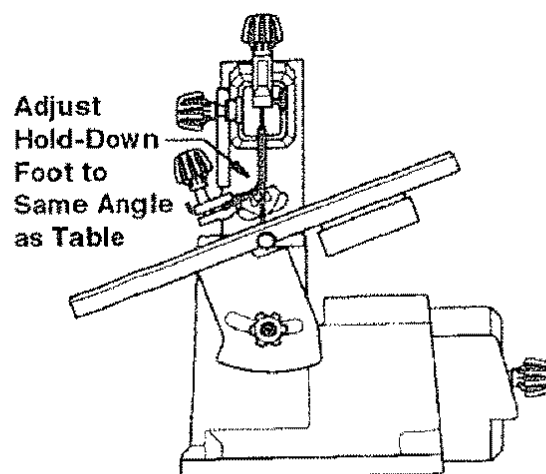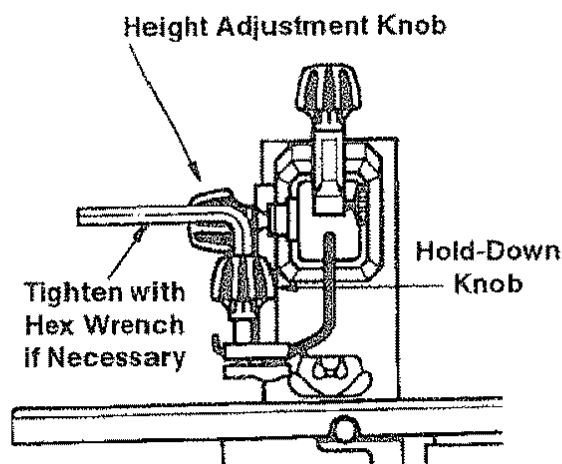

Over Tensioning Or Under Tensioning Blade

Too much or too little blade tension could cause blades to break rapidly.

The thicker, harder and more abrasive the wood you are cutting, the more blades you will have to use.

Blade breakage is caused by the following:



- Over tension or under tension.
- Twisting or bending the blade.
- Over use - blade life exhausted.
- **Over Aggressive Feeding** of the workpiece into the blade by going too fast.





Alignment (Adjustments) (continued)

Removing Pin End Blades

WARNING: To avoid injury from accidental starting, always turn switch "OFF" and unplug power cord from outlet before removing or replacing the blade.

NOTE: Saw comes with pin end blades. If you are going to use plain end blades, refer to the instructions under "Installing Plain End Blades".

- Loosen tension on blade by turning tension knob counterclockwise  about three full turns.
- Loosen upper and lower blade holder knobs by turning the blade holder knobs counterclockwise  about three full turns. To make lower blade holder access easier, tilt the table to 45°, and raise the arms to the up position using a screwdriver to rotate the motor shaft.
- Remove blade from the lower blade holder by pushing down on the upper arm, releasing the pin end blade from the lower blade holder. Remove blade from the upper blade holder by slightly lifting up on the blade and pulling forward.

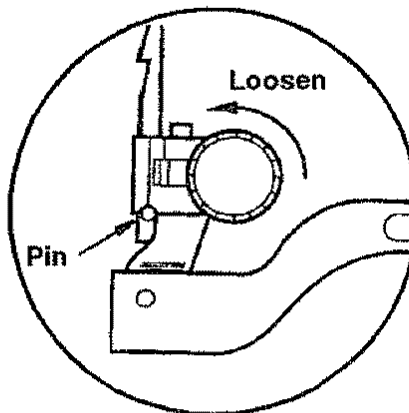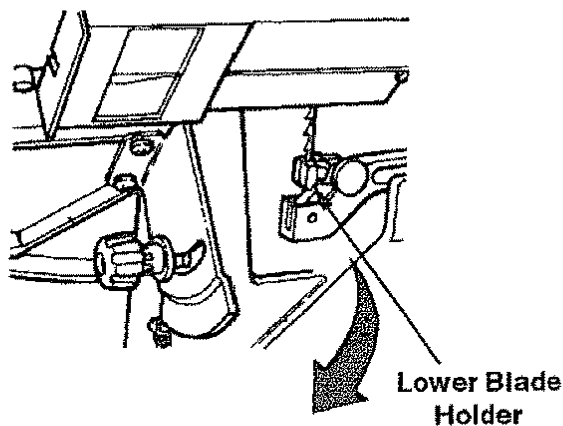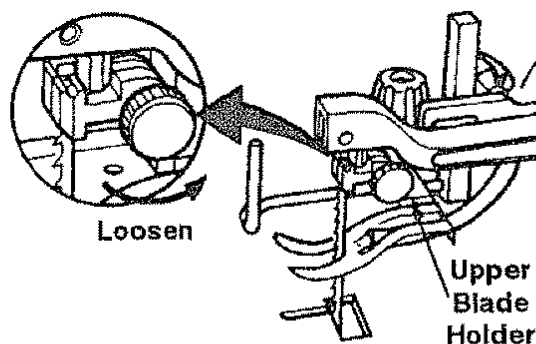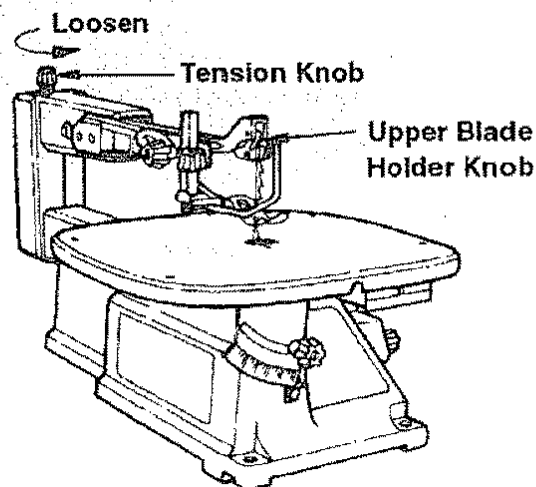

Installing Pin End Blades


Pin end blade set up:

- Check that the blade tension knob is loose.
- Check that the upper and lower blade holder knobs are loose. Spread blade holder jaws open using fingers.






NOTE: A rubber band looped around the back of the blade holder will automatically open the jaws when the knobs are loosened which will make changing blades easier. See illustration below.

- Install the blade through the opening in the table with the teeth pointing down. Engage the pin into the "V" notch of the lower blade holder.
- Pull up on the blade and engage the upper pin in the "V" notch of the upper blade holder.
- Align blade straight with the front face of the blade holders. Tighten upper and lower blade holder knobs by turning knobs clockwise until the jaws close evenly against the blade.

NOTE: To prevent blade holder damage, do not use pliers to tighten knob.

- Carefully tighten the blade tension by turning the tension knob clockwise  until you feel the slack in the blade is removed.
- Check to see that the pins are properly located in the V-notch slot. Turn the tension knob an additional two full turns clockwise. This amount of blade tension should do well for most cutting operations and blades. The number of turns will be approximately two full turns. This will vary one or two turns depending on blade thickness and blade type.
- Make sure the blade is properly installed. Before applying power, rotate the motor shaft by hand using a screwdriver in the motor shaft slot as shown.



WARNING: To avoid injury from thrown objects, remove all tools from the saw.

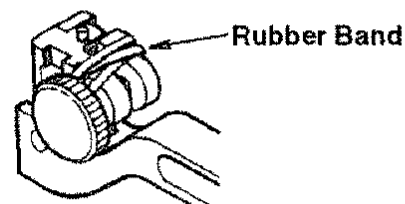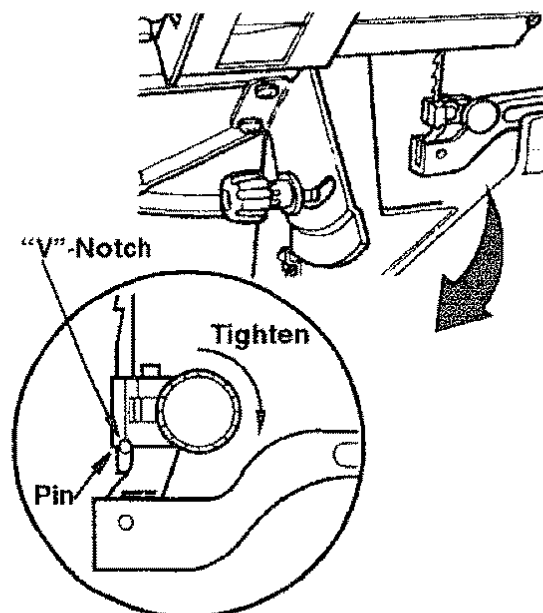
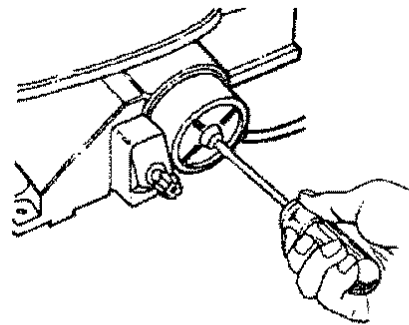
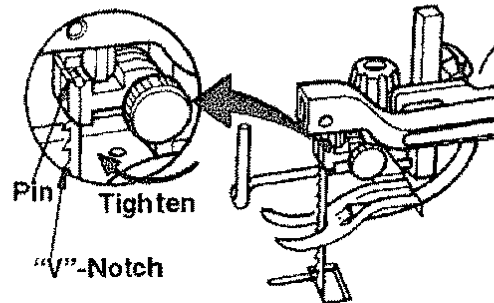
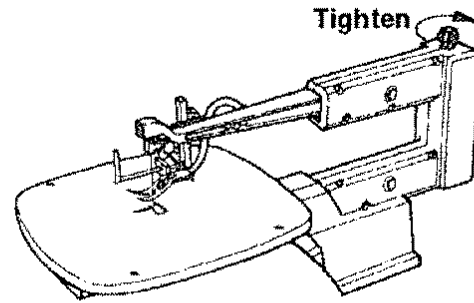


Alignment (Adjustments) (continued)

Removing Plain End Blades

WARNING: To avoid injury from accidental starting, always turn switch "OFF" and unplug power cord from outlet before removing or replacing the blade.


- Loosen tension on blade by turning tension knob counterclockwise  about three full turns.
- Loosen the upper blade holder by turning the knob on the holder counterclockwise  so the jaws open.
- Remove blade from upper blade holder.
- Loosen the lower blade holder knob in the same way as the upper blade holder in step 2. To make lower blade holder access easier, tilt the table to 45° and raise the arms to the up position using a screwdriver to rotate the motor shaft.
- Remove blade from lower blade holder.

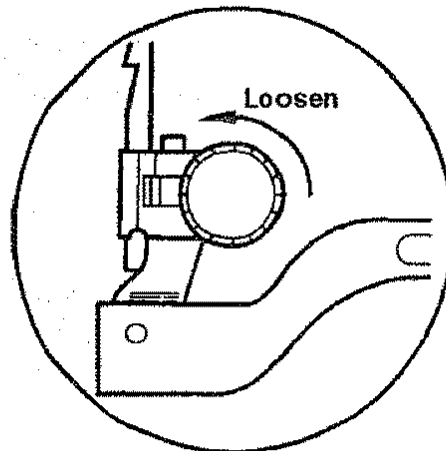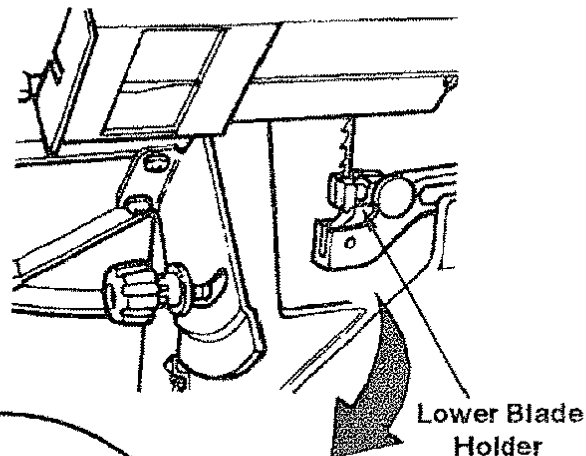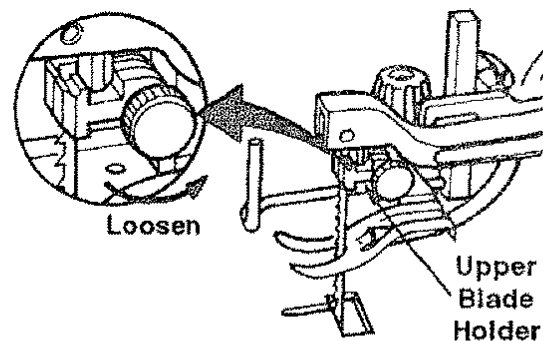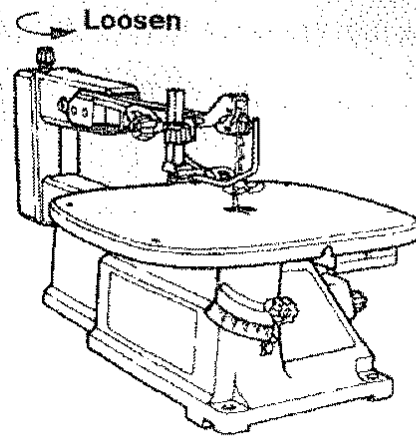


Installing Plain End Blades


- Check that the blade tension knob is loose.
- Check that the upper and lower blade holder knobs are loose. Spread blade holder jaws open using fingers.

NOTE: A rubber band looped around the back of the blade holder will automatically open the jaws when the knobs are loosened which will make changing blades easier. See illustration below.






- Install the blade through the hole in the table and into the lower blade holder. The blade teeth should point down. Position the blade so that it is straight with the front face of the blade holder and extends beyond the blade holder as shown.
- Tighten the lower blade holder knob by turning the knob clockwise  until the jaws close securely.

NOTE: To maintain blade holder clamping force, keep finger knob threads cleaned and oiled using all purpose household machine (or motor) oil. To prevent blade holder damage, do not use pliers to tighten knob.

- Use the same procedure to install the blade into the upper blade holder. Before tightening the jaws using the upper blade holder knob, adjust the position of the upper blade holder by turning the blade tension knob until the end of the blade is near the top of the blade holder as shown. Tighten the upper blade holder knob by turning the knob clockwise  until the jaws close securely.

- Tighten the blade tension knob clockwise  until the blade is tensioned. The number of turns will be approximately two full turns. This will vary one or two turns depending on the blade thickness and blade type.
- Make sure the blade is properly installed. Before applying power, rotate the motor shaft by hand using a screwdriver in the motor shaft as shown.

NOTE: To prevent blade holder damage, do not use pliers to tighten knob.

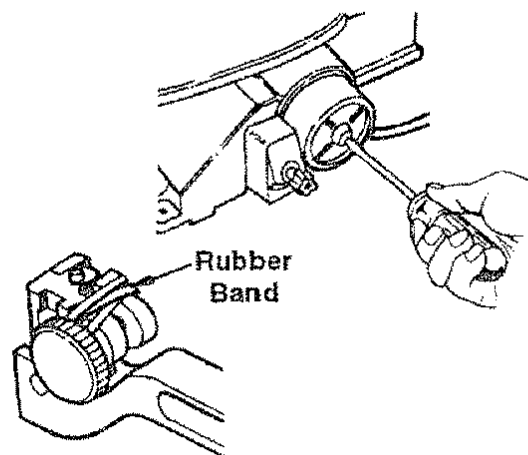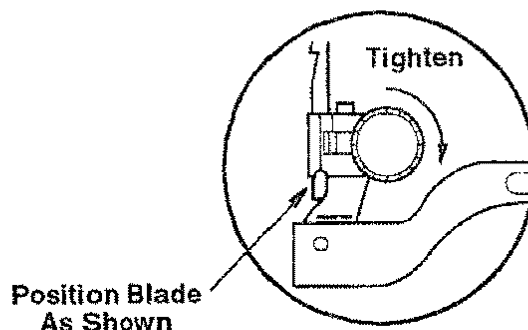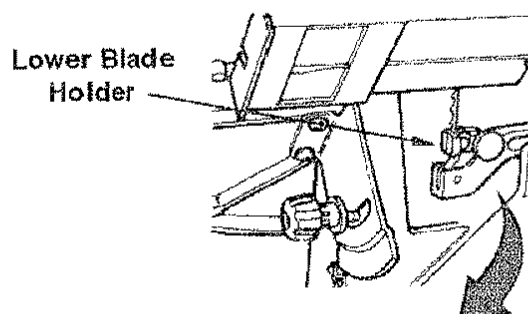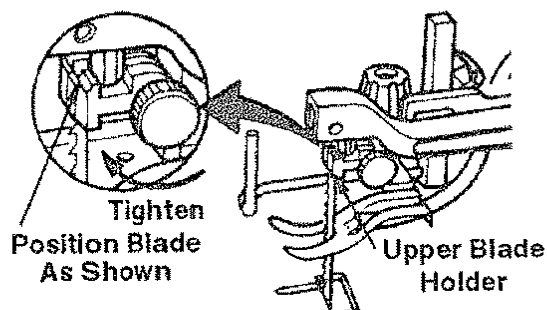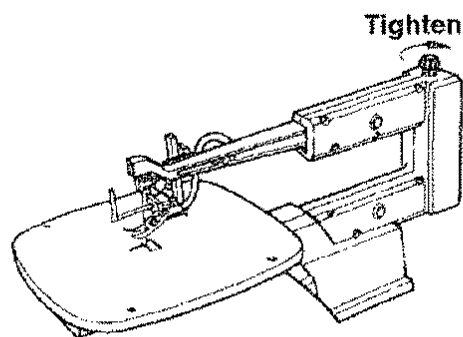


Alignment (Adjustments) (continued)

Dust Blower

The dust blower will direct air to the most effective point on the cutting line when the hold down is adjusted. No adjustment is necessary to the blower.

Blade Guard

The blade guard will always be positioned parallel to the blade. No adjustment is necessary.

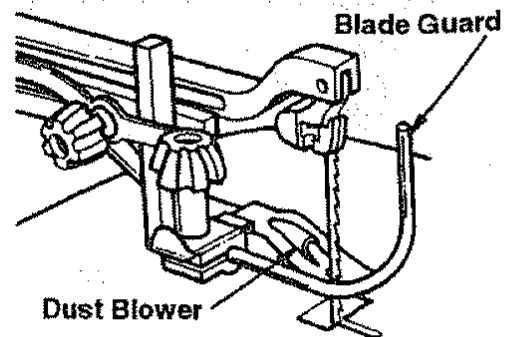

Mounting the Scroll Saw

Workbench Applications

- When mounting this saw to a workbench a solid wood bench is preferred over a plywood bench where noise and vibration will be more noticeable.
- Hardware to mount this saw to a workbench is **not** supplied with the saw. However, we recommend the hardware used be not smaller than the following.

Description	Qty.
Hex Head Screw, 1/4-20 x length required	3
Flat Washers, 1/4 I.D.	6
Lock Washers, 1/4 I.D.	3
Hex Nuts, 1/4-20	6
• A soft foam pad to place between your scroll saw and workbench is not supplied with the saw. However, we highly recommend the use of such a pad to reduce noise and vibration.	




Description	Qty.
Soft foam pad such as carpet padding, 24" x 12" x 1/2"	1

Do **NOT** over tighten mounting bolts - leave some cushion in the foam pad for absorbing noise and vibration.

NOTE: Through normal use sawdust accumulates under the unit. Frequently clean sawdust from under the unit to prevent the linkage from binding, which could overload and damage the motor.

Legset Applications

1. If you prefer to mount your saw to a leg set, we recommend the leg set for bench top tools which is available through Sears Retail Stores. The number of this leg set is 9-22244. This leg set is an optional accessory and instructions to mount the scroll saw to this leg set are included in the leg set package.

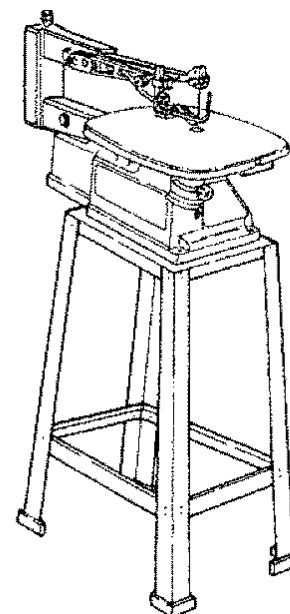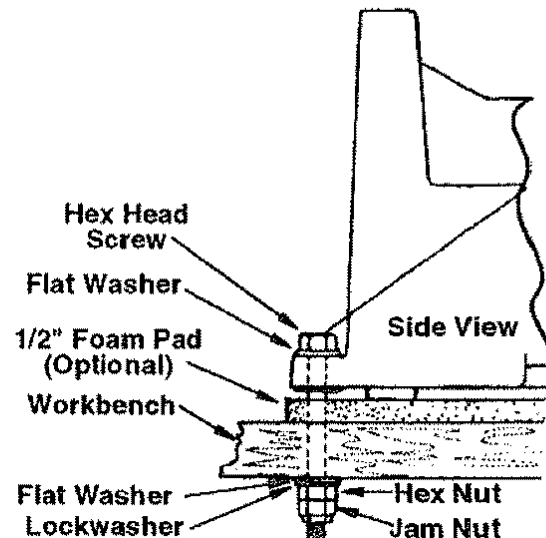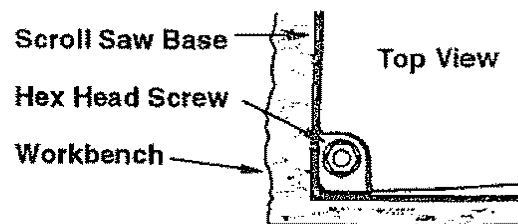

Safety Instructions for Basic Saw Operations

Before Each Use

Inspect your saw.

Disconnect The Saw. To avoid injury from accidental starting, turn the switch "OFF", unplug the saw before changing the setup, removing covers, guards or blade.

Check Damaged Parts. Check for:

- Alignment of moving parts.
- Binding of moving parts.
- Broken parts.
- Stable mounting.
- Any other conditions that may affect the way the saw works.
- If any part is missing, bent or broken in any way, or any electrical parts don't work properly, turn the saw off and unplug the saw. **Replace** damaged, missing or failed parts before using the saw again. **Keep Guard In Place** and in working order.

Maintain Tools With Care. Keep the saw clean for best and safest performance. Follow instructions for lubricating.

Remove adjusting keys and wrenches from tool before turning it on.

To avoid injury from jams, slips or thrown pieces:

- **Use Only Recommended Accessories.** (See "Recommended Accessories" section). Consult this Owner's manual for recommended accessories. Follow the instructions that come with the accessories. The use of improper accessories may cause risk of injury to persons.
- Choose the right size and style blade for the material and the type of cutting you plan to do.
- Make sure the blade teeth point downward, toward the table.

- Make sure the blade tension is properly adjusted.

- **Keep Work Area Clean.** Cluttered areas and benches invite accidents. Floor must not be slippery.

To avoid burns or other fire damage, never use the saw near flammable liquids, vapors or gases.

- **Know Your Saw.** Read and understand the owners manual and labels affixed to the tool. Learn its applications and limitations as well as the specific potential hazards peculiar to this tool.
- To avoid injury from accidental contact with moving parts, don't do layout, assembly or setup work on the saw while any parts are moving.
- **Avoid Accidental Starting.** Make sure switch is "OFF" before plugging saw into a power outlet.

Plan your work.

- **Use The Right Tool.** Don't force tool or attachment to do a job it was not designed to do.
- Use this scroll saw to cut only wood, wood-like products, plastics and non-ferrous metals.

CAUTION: This saw is **NOT** designed for cutting ferrous metals like iron or steel. When cutting nonferrous metals (brass, copper and aluminum, etc.), metal shavings can react with wood dust and start a fire. To avoid this:

- Remove all traces of wood dust from inside the saw.
- Remove all traces of metal dust from on or around the saw before sawing wood again.

Safety Instructions for Basic Saw Operations (continued)

Plan Ahead To Protect Your Eyes, Hands, Face And Ears

Any power saw can throw foreign objects into the eyes. This can cause permanent eye damage. Wear safety goggles (not glasses) that comply with ANSI Z87.1 (shown on package). Everyday eye-glasses have only impact resistant lenses. They are not safety glasses. Safety goggles are available at Sears Retail Stores. Glasses or goggles not in compliance with ANSI Z87.1 could seriously hurt you when they break.

Dress for safety

- Do not wear loose clothing, gloves, neckties or jewelry (rings, wrist-watches). They can get caught and draw you into moving parts.
- Wear non-slip footwear.
- Tie back long hair.
- Roll long sleeves above the elbow.
- Noise levels vary widely. To avoid possible hearing damage, wear ear plugs or muffs when using saw for hours at a time.
- For dusty operations, wear a dust mask along with the safety goggles.

Inspect your workpiece.

Make sure there are no nails or foreign objects in the part of the workpiece to be cut.

Use extra caution with large, very small or awkward workpieces

- Never use this tool to finish pieces too small to hold by hand.
- Use extra supports (tables, saw horses, blocks, etc.) for any workpiece large

enough to tip when not held down to the table top.

- **Never** use another person as a substitute for a table extension, or as additional support for a workpiece or to help feed, support or pull the workpiece.
- When cutting irregularly shaped workpieces, plan your work so it will not pinch the blade. A piece of molding, for example, must lay flat or be held by a fixture or jig that will not let it twist, rock or slip while being cut.
- Properly support round material such as dowel rods or tubing. They have a tendency to roll during a cut, causing the blade to "bite". To avoid this, always use a "V" block.
- Cut only one workpiece at a time.
- Clear everything except the workpiece and related support devices off the table before turning the saw on.

Plan the way you will hold the workpiece from start to finish.

- Do not hand hold pieces so small that your fingers will go under the blade guard. Use jigs or fixtures to hold the work and keep your hands away from the blade.
- Avoid awkward operations and hand positions where a sudden slip could cause fingers or hand to move into the blade.
- **Don't Overreach.** Keep good footing and balance.
- Keep your face and body to one side of blade, out of line with a possible thrown piece if the blade should break.

Whenever Saw Is Running

WARNING: Don't let familiarity (gained from frequent use of your saw) cause a careless mistake. A careless fraction of a second is enough to cause a severe injury.

- Before starting your cut, watch the saw while it runs. If it makes an unfamiliar noise or vibrates a lot, stop immediately. Turn the saw off. Unplug the saw. Do not restart until finding and correcting the problem.

- **Keep Children Away.** Keep all visitors a safe distance from the saw. Make sure bystanders are clear of the saw and workpiece.
- **Don't Force Tool.** It will do the job better and safer at its designed rate. Feed the workpiece into the saw blade only fast enough to let it cut without bogging down or binding.

Before freeing any jammed material:

- Turn switch "OFF".
- Wait for all moving parts to stop.
- Unplug saw.

When backing up the workpiece, the blade may bind in the kerf (cut). This is usually caused by sawdust clogging up the kerf. If this happens:

- Turn switch "OFF".
- Wait for all moving parts to stop.
- Unplug saw.
- With a flat blade screwdriver, turn the motor by hand while backing up the workpiece.

Before removing loose pieces from the table, turn saw off and wait for all moving parts to stop.

Before Leaving The Saw:

- Wait for all moving parts to stop.
- **Make Workshop Child-proof.** Unplug the saw. Lock the workshop and ON/

OFF knob on the saw. Store the key away from children and others not qualified to use the tool.

Basic Saw Operations**General Instructions**

Please, read and understand the following items about your scroll saw before attempting to use the saw.

- The saw does not cut wood by itself. You allow the saw to cut wood by guiding the wood into the blade as it moves.
- The blade teeth cut wood **only** on the down stroke.
- You must guide the wood into the blade slowly because the teeth of the blade are very small and they can only remove wood when they are on the down stroke.
- There is a learning curve for each person who wants to use this saw. During that period of time it is expected that some blades will break until you learn how to use the saw and receive the greatest benefit from the blades.
- Best results are achieved when cutting wood less than one inch thick.
- When cutting wood thicker than one inch the user must guide the wood very, very slowly into the blade and take extra care not to bend or twist the blade while cutting in order to maximize blade life.
- Teeth on scroll saw blades wear out and as such must be replaced frequently for best cutting results. Scroll saw blades generally stay sharp for 1/2 hour to 2 hours of cutting.
- To get accurate cuts, be prepared to compensate for blade's tendency to follow the wood grain as you are cutting.
- This scroll saw is intended to cut wood, wood-like products, plastics and non-ferrous metals.
- When choosing a blade to use with your scroll saw, consider the following carefully.
 - Very fine, narrow blades should be used to scroll cut in thin wood 1/4 inch thick or less.
 - To cut wood over 1/4 inch thick, use wider blades.
 - Most blade packages state the size or thickness of wood which that blade is intended to cut, and the radius, size of curve, which can be cut with that blade.
 - Wider blades can't cut curves as tight or small as thinner blades.
 - Narrower blades work well only on thinner wood material.
- This saw uses 5 inch long pin and plain end type blades only. See your Sears Retail Store for accessory blades.
- Blades wear faster when cutting plywood, which is very abrasive; when sawing wood which is thicker than the 7/8 inch blade stroke; and when sawing hardwood, or when side pressure is placed on the blade.

Basic Saw Operations (continued)


Making Interior Scroll Cuts

- One of the features of this saw is that it can be used to make scroll cuts on the interior of a board without breaking or cutting into the outline or perimeter of the board.

WARNING: To avoid injury from accidental starting, always turn switch "OFF" and remove plug from power source outlet before removing or replacing the blade.

- To make interior cuts in a board, remove the scroll saw blade as explained in the Assembly section.
- Drill a 1/4" or larger hole in the board you will use to make interior cuts.
- Place the board on the saw table with the hole in the board over the access hole in the table.
- Install the blade through the hole in the board and adjust blade tension.

- When finished making the interior scroll cuts, simply remove the blade from the blade holders, as described in the Assembly section, and remove the board from the table.

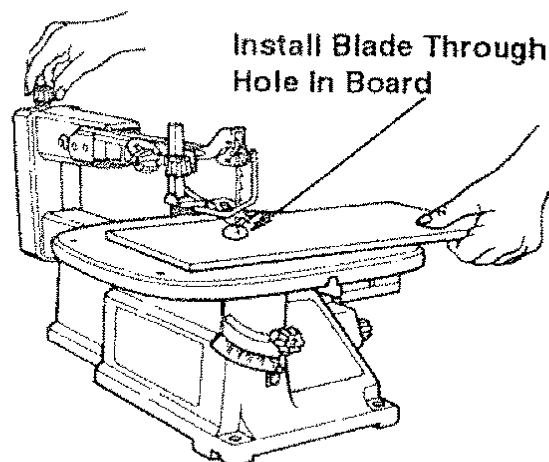

Choice of Blade and Speed

Your scroll saw accepts a wide variety of 5" plain end and pin end blades. As a general guide:

- Use a finer tooth blade for cutting thin workpiece, when a smoother cut is required for hard materials or when using slow saw speeds.
- Use a coarser tooth blade for cutting thicker workpieces, when making straight cuts, for medium to soft materi-

als or when using faster saw speeds.

- Use a blade that will have at least 2 teeth in the material at all times.
- Use thin, narrow blades for tight radius work, and thick, wide blades for large curves and straight cuts.

Listed below are examples of some blades and their intended uses:

Pin and Plain end Blades

Teeth/ Inch	Width	Thickness	Speed	Application
20 15	.029" .110"	.012" .018"	500- 600	Tight radius work; 3/32" to 1/8" wood veneer, wood, bone, fiber, plastics, non-ferrous metals, etc.
12.5	.038"	.016"	600- 1200	Close radius cutting in materials 3/32" to 1/2" thick. Good for hard and soft wood, bone, horn, plastics, etc.
11.5 10	.053" .110"	.018" .018"	1200- 1700	For hard and soft woods and wood-like products 3/16" and up.

Maintenance


WARNING: For your own safety, push control knob "OFF" and remove plug from power source outlet before maintaining or lubricating your saw.

General

An occasional coat of paste wax on the work table will allow the wood being cut to glide smoothly across the work surface.

Drawer - Apply oil safe for plastic to drawer and guide as necessary.

To maintain blade holder clamping force, keep finger knob threads cleaned and oiled using all purpose household machine (or motor) oil.

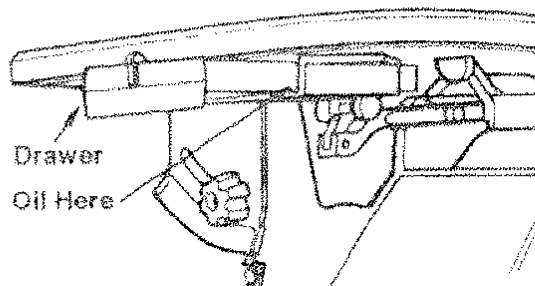

Motor/electrical

The motor bearings are permanently lubricated and require no further lubrication.

Do not attempt to oil the motor bearings or service the motor internal parts.


WARNING: If the power cord is worn, cut or damaged in any way, have it replaced immediately.

WARNING: To avoid fire or electrocution, reassemble electric parts with only approved service parts. Reassemble exactly as originally assembled.

Arm Bearings

Lubricate the arm bearings after 10 hours of use. Re-oil after every 50 hours of use or whenever there is a squeak coming from the bearings.

- Turn saw on its side.
- Squirt a generous amount of SAE 30 oil around the shaft end and bronze bearing.
- Let the oil soak in overnight in this position.
- Next day repeat the above procedure for the opposite side of the saw.

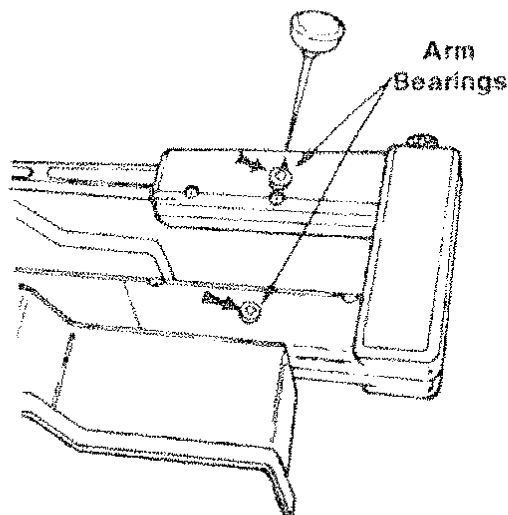

Sears Recommends the Following Accessories

Recommended Accessories

Blades. See Sears Retail Store
for 5" long Plain End/Pin End blades

Leg Set 9-22244


Troubleshooting

WARNING: For your own safety, turn switch "OFF", and remove plug from power source outlet before troubleshooting your scroll saw.

Problem	Probable Cause	Remedy Schedule
Breaking Blades.	<ol style="list-style-type: none"> 1. Wrong tension 2. Over working blade. 3. Wrong blade application. 4. Twisting blade in wood. 	<ol style="list-style-type: none"> 1. Adjust blade tension. 2. Reduce feed rate. 3. Use narrow blades for cutting thin wood, wide blades for thicker wood. 4. Avoid side pressure on blade.
Plain end blade slips within blade clamp	<ol style="list-style-type: none"> 1. Blade clamp not tightened 2. End of blade becomes burnished. 3. Dirty finger knob threads. 	<ol style="list-style-type: none"> 1. Tighten blade clamp. 2. Roughen end of blade with emery (100 grit) 3. Clean and oil threads.
Motor will not run.	<ol style="list-style-type: none"> 1. Damaged cord or plug. 2. Damaged motor or control board. 	<ol style="list-style-type: none"> 1. Replace damaged parts before using saw again. 2. Consult Sears Service. Any attempt to repair this motor or control board may create a HAZARD unless repair is done by a qualified service technician. Repair service is available at your nearest Sears Store.
Vibration NOTE: There will always be some vibration present when the saw is running because of the blade and arm movement.	<ol style="list-style-type: none"> 1. Improper mounting of the saw. 2. Unsuitable mounting surface. 3. Loose table 4. Loose motor mounting. 	<ol style="list-style-type: none"> 1. See mounting instructions in this manual for proper mounting technique. 2. The heavier your workbench is, the less vibration will occur. A plywood workbench will not be as good a work surface as the same size solid lumber. Use common sense in choosing a mounting surface. 3. Tighten table lock knob. 4. Tighten motor mounting screws.
Motor stops during cuts	<ol style="list-style-type: none"> 1. Aggressive feeding causes Current Protector to shut motor off. 2. Excessive sawdust under unit may bind linkage, causing current protector to shut motor off. 	<ol style="list-style-type: none"> 1. Turn machine "OFF" and then back "ON" to continue cutting. Slow down the feed rate of material into blade. 2. Clean sawdust from under unit.

Wiring Diagram


WARNING: To avoid fire or shock, use only recommended service parts and reassemble exactly as originally assembled.

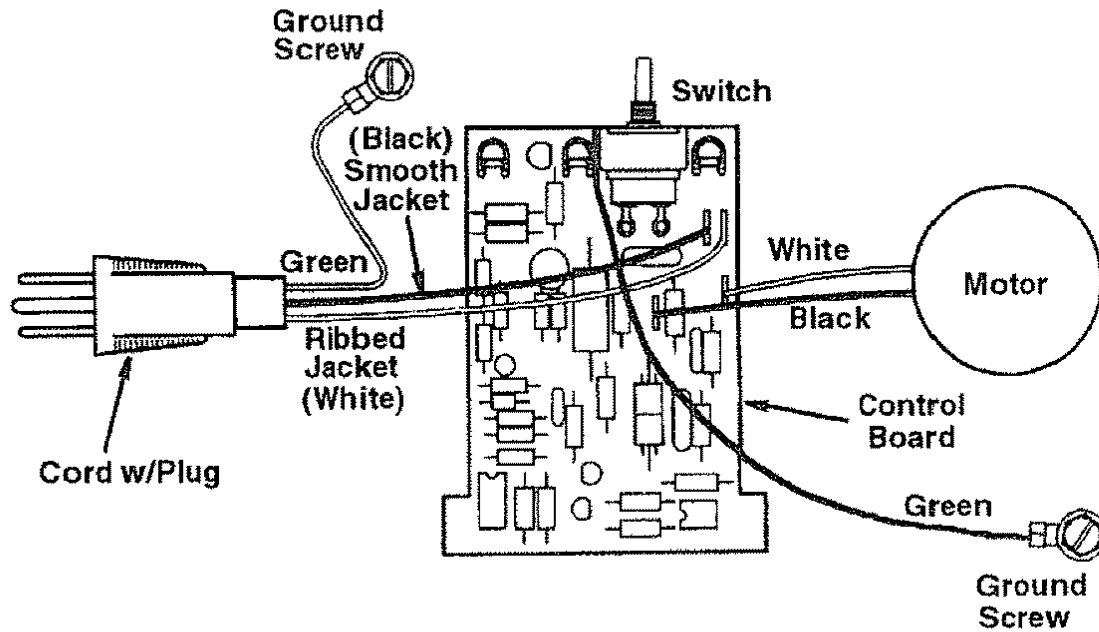

Parts List For Craftsman 16" Variable Speed Scroll Saw

Model No. 113.236090

Always Order By Part Number-Not By Key Number

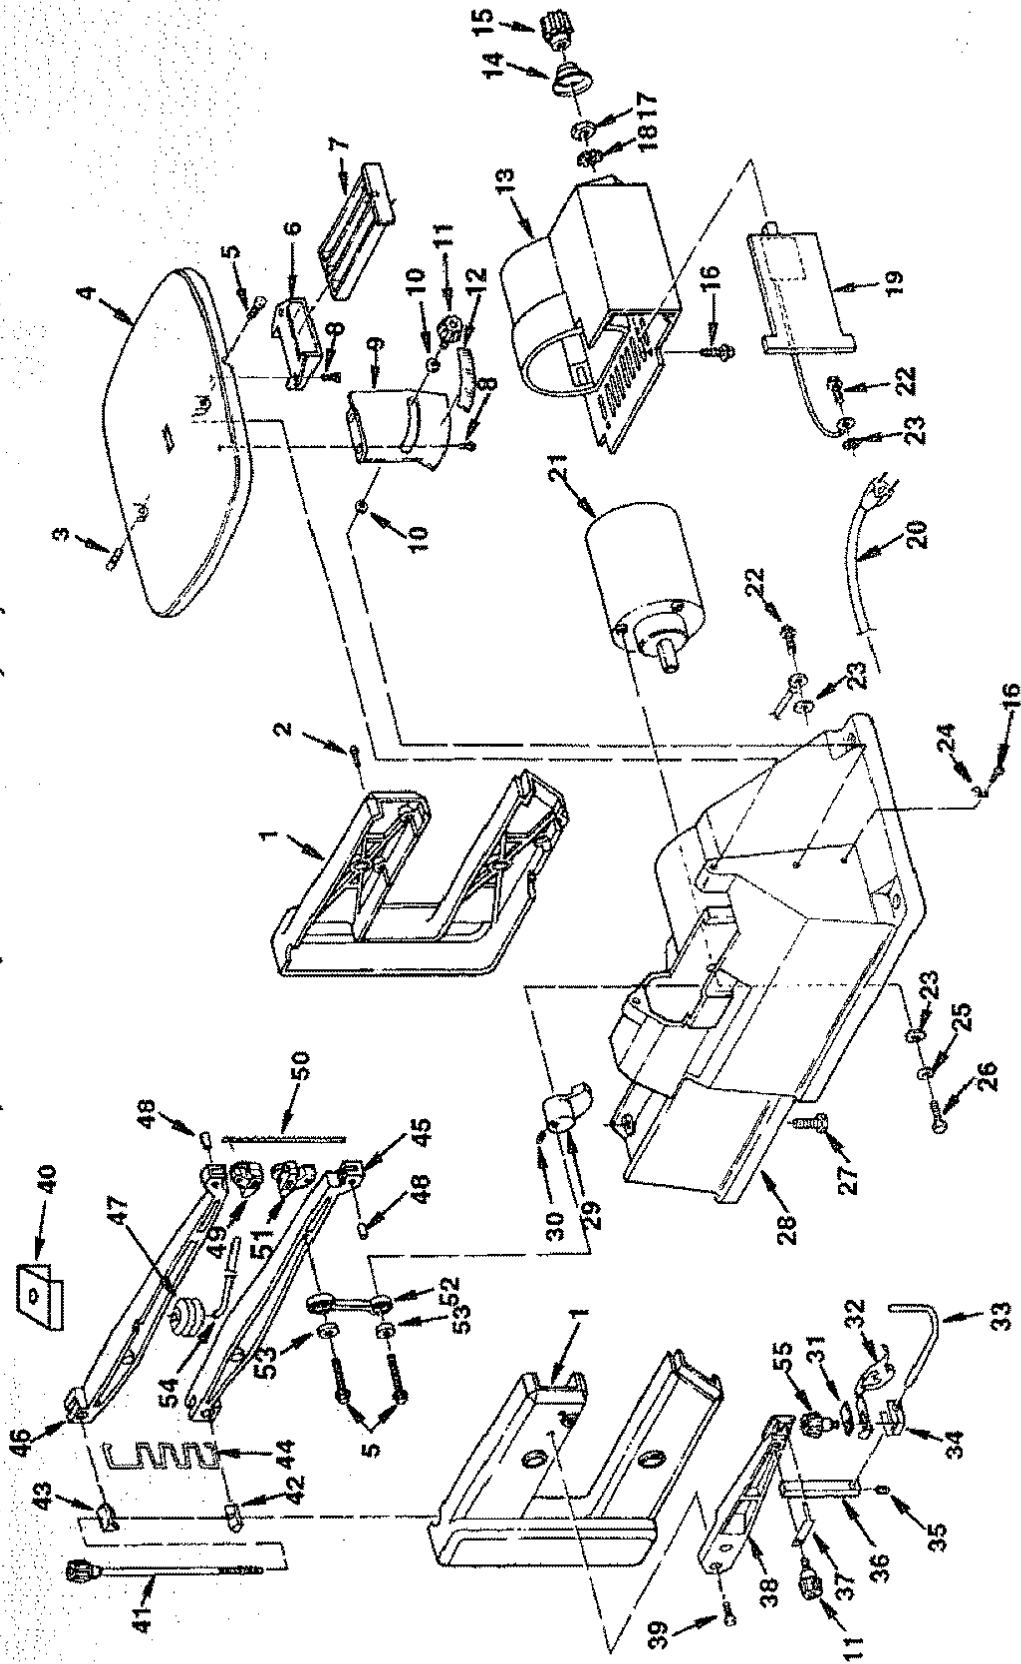

Parts List for Craftsman 16" Variable Speed Scroll Saw Model No. 113.236090

Always Order By Part Number-Not By Key Number

Key No.	Part No.	Description
1	823887-1	Housing (Includes Key #2)
2	66071	Screw Pan Hd Ty "T" 8-32 x 1-1/8
3	60326	Pin, Roll .219 x 3/4
4	823831	Table
5	821521	Screw Hex Wash Shldr Ty "T" 1/4-20 x 1/2
6	823808	Guide Drawer
7	823804	Drawer
8	STD601103	* Screw Pan Hd Ty "T" 10-32 x 3/8
9	821522	Scale Bevel
10	STD551025	* Washer 17/64 x 5/8 x 1/16
11	821520	Knob Bevel
12	821510	Label Bevel Scale
13	823815	Housing Motor
14	823807	Guard Finger
15	823816	Knob
16	822016	Screw Hex Washer Hd Ty "T" #10 x 5/8
17	815335	Nut Hex Jam 3/8-32
18	STD551237	* Lockwasher 3/8
19	823792	Board, Control
20	823801	Cord w/Plug
21	823634	* Motor
22	823168	Screw Hex Washer Hd 10-32 x 3/8 Green
23	STD551210	Lockwasher #10
24	66052	Indicator Tilt
25	STD551010	* Washer #10
26	813094-1	* Screw Hex Hd 10-32 x 7/8
27	60206	Screw Hex Hd Ty "T" 1/4-20 x 1-1/2
28	823790	Base

* Standard hardware item - may be purchased locally

† Stock item - may be secured through the Hardware department of most Sears Retail Stores.

Key No.	Part No.	Description
29	823802	Coupling Eccentric
30	STD502503	* Screw Soc Set 1/4-20 x 3/8
31	823830	Support Plate
32	823827	Spring Hold Down
33	823806	Guard, Blade
34	823800	Clamp Hold Down
35	64729	Screw, Soc Set, 10-32 x 3/16
36	823828	Support Bar
37	823822	Plate Clip
38	823829	Support, Hold Down
39	216278	Screw, Soc Cap, 1/4-20 x 1/2
40	824646	Bellows Cover
41	508855	Knob-Bolt, Tension
42	821529	Nut, Tension
43	821530	Wedge, Tension
44	821531	Spring, Tension
45	824313	Arm, Lower
46	823789	Arm, Upper
47	823791	Bel lows
48	STD571807	* Pin Roll 3/16 x 9/16
49	823811	Holder Blade Upper
50	9-26879	† Blade
51	823810	Holder Blade Lower
52	66036	Link (Includes Key #53)
53	STD315485	* Bearing Ball
54	823812	Hose
55	824478	Knob Hold-Down
—	SP5837	Owner's Manual (Not Illustrated)


• Any attempt to repair this motor may create a hazard unless repair is done by a qualified service technician. Repair service is available at your nearest Sears store.

For the repair or replacement parts you need

Call 7 am - 7 pm, 7 days a week

1-800-366-PART

(1-800-366-7278)



For in-home major brand repair service

Call 24 hours a day, 7 days a week

1-800-4-REPAIR


(1-800-473-7247)



**For the location of a
Sears Repair Service Center in your area**

Call 24 hours a day, 7 days a week


1-800-488-1222

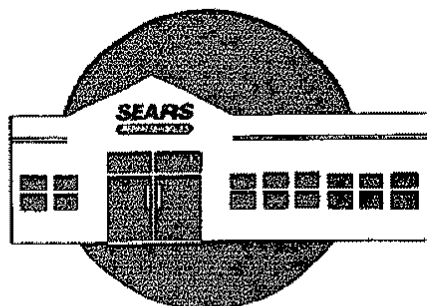

**For information on purchasing a Sears
Maintenance Agreement or to inquire
about an existing Agreement**

Call 9 am - 5 pm, Monday-Saturday

1-800-827-6655



SEARS
REPAIR SERVICES

America's Repair Specialists

The model and serial numbers will be found attached to right side of arm housing.

When requesting service or ordering parts, always provide the following information:

- Product Type
- Model Number
- Part Number
- Part Description

Sears, Roebuck and Co., Hoffman Estates, IL 60179 U.S.A.

Part No. SP5837

Form No. SP5837-2

Printed in U.S.A. 7/97